




ZOOMLION

# NEW ZT22JE ZT26JE ELECTRIC TELESCOPIC BOOM LIFT

Comply with CE/ANSI/CSA Standard



## HIGHLIGHTS

- ▶ Customized lithium-ion battery features green, environmental protection, lownoise and zero-emission, ideal for construction and plant maintenance.
- ▶ lithium-ion batteries combined with excellent energy management system provide longer running time.
- ▶ Low-temperature regenerative current control and power self-adaptive control effectively improve the safety of Li-ion battery and greatly prolong the batteries service life of at least 10%.
- ▶ Provide a variety of standard charging plugs and 10A/16A/32A multi-power optional charging mode featuring strong charging adaptability.
- ▶ Brand-new appearance with lightweight GFRP composite material hood and integrally formed coating features anti-corrosion, heat preservation, aging resistance and easy cleaning.
- ▶ Assembled large-opening component box, open-close hood, and a variety of reserved inspection holes easy to service.
- ▶ Accurate and efficient traveling AC drive system provides strong power and stable control. Gradeability reaches 45% and motor is maintenance-free for its lifetime.

## FEATURES

### Standard Features

Horn	Emergency descent system	Tilt protection system
Proportional control	Emergency stop button	Oscillating axle
All motion alarm	Secondary Guarding System	Load sensing system
Flashing beacon	Auto-leveling system	4.3' Led display
Self-closing entry gate	On-board diagnostic system	Swing-out engine tray

### Accessories & Options

Platform work light	Low-temperature hydraulic oil
AC power to platform	Synthetic biodegradable hydraulic oil
Air line to platform	Non-marking tire

## ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353680 0086(731)-88250971  
E-mail: awm@zoomlion.com

Add: ZOOMLION Wangcheng Industrial Park, Tengfei Road 997, Changsha, Hunan, China  
Web: www.en.zoomlion.com






**ZOOMLION**


# ELECTRIC TELESCOPIC BOOM LIFTS

## **L** **NEW** **ELECTRIC** **ZT22JE/ZT26JE** Comply with CE/ANSI/CSA Standard

Model	ZT26JE		ZT22JE	
<b>Size</b>				
	<b>Metric</b>	<b>Imperial</b>	<b>Metric</b>	<b>Imperial</b>
Work Height	28.70m	94ft 2in	24.40m	80ft 1in
Platform Height	26.70m	87ft 7in	22.40m	73ft 6in
Horizontal Outreach	22.1m	82ft 6in	17.9m	58ft 9in
A - Stowed Length	11.91m	39ft 1in	10.3m	33ft 10in
B - Stowed Width	2.49m	8ft 2in	2.49m	8ft 2in
C - Stowed Height	2.82m	9ft 3in	2.76m	9ft 1in
D - Platform Length	2.44m	8ft	2.44m	8ft
E - Platform Width	0.91m	3ft	0.91m	3ft
Jib Length	1.83m	6ft	1.83m	6ft
F - Wheelbase	2.80m	9ft 2in	2.52m	8ft 3in
Tread	2.49m	6ft 11in	2.49m	6ft 12in
G - Ground Clearance	0.41m	1ft 4in	0.41m	1ft 4in
<b>Performance</b>				
Platform Capacity (Unrestricted/Restricted)	300/454kg	660/1000lb	300/454kg	660/1000lb
Drive Speed (Stowed)	5.5km/h	3.42mph	5.5km/h	3.42mph
Gradeability	45% (24°)		45% (24°)	
Turning Radius (Inside)	3.11m	10ft 2in	2.72m	8ft 11in
Turning Radius (Outside)	6.16m	20ft 3in	5.58m	18ft 4in
Turntable Swing	360° continuous		360° continuous	
Platform Rotation	±90°		±90°	
Tail Swing	1.61m	5ft 3in	1.61m	5ft 3in
Jib Rotation	130° (-55°~75°)		130° (-55°~75°)	
Max. Wind Speed	12.5m/s	28mph	12.5m/s	28mph
<b>Power</b>				
Battery	80V		80V	
Charger	5KW/80V		5KW/80V	
Drive Motor	5.2KW		4.2KW	
Lifting Motor	30KW		21KW	
Auxiliary Power	12V DC		12V DC	
Hydraulic Tank	120L	32 US gal	120L	32 US gal
<b>Tire</b>				
Type	15-625 Foam-filled Tires 385/65-24 Solid Tires		355/55-24.5 Foam-filled Tires 355/55 D625 Solid Tires	
<b>Weight</b>				
Gross	17600kg	39462lb	13200kg	29101lb

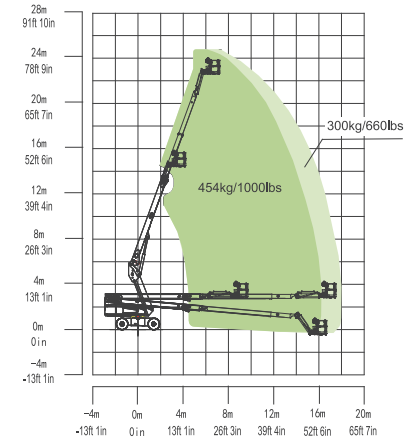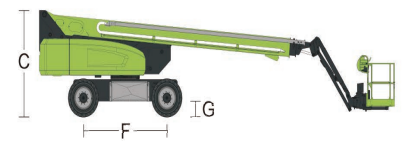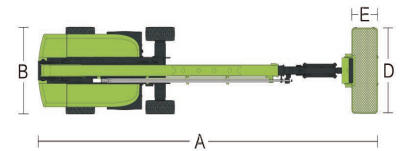

Range of Motion ZT22JE

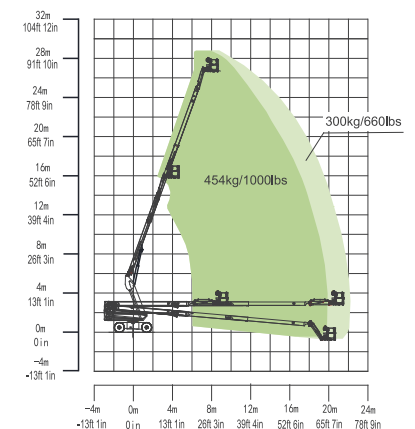

Range of Motion ZT26JE

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification. Product specifications are updated to August, 2022.