


MAX-JAX™

SUMNER

Sumner Manufacturing Co, Inc.

www.sumner.com

THE IDEAL FABRICATOR STAND

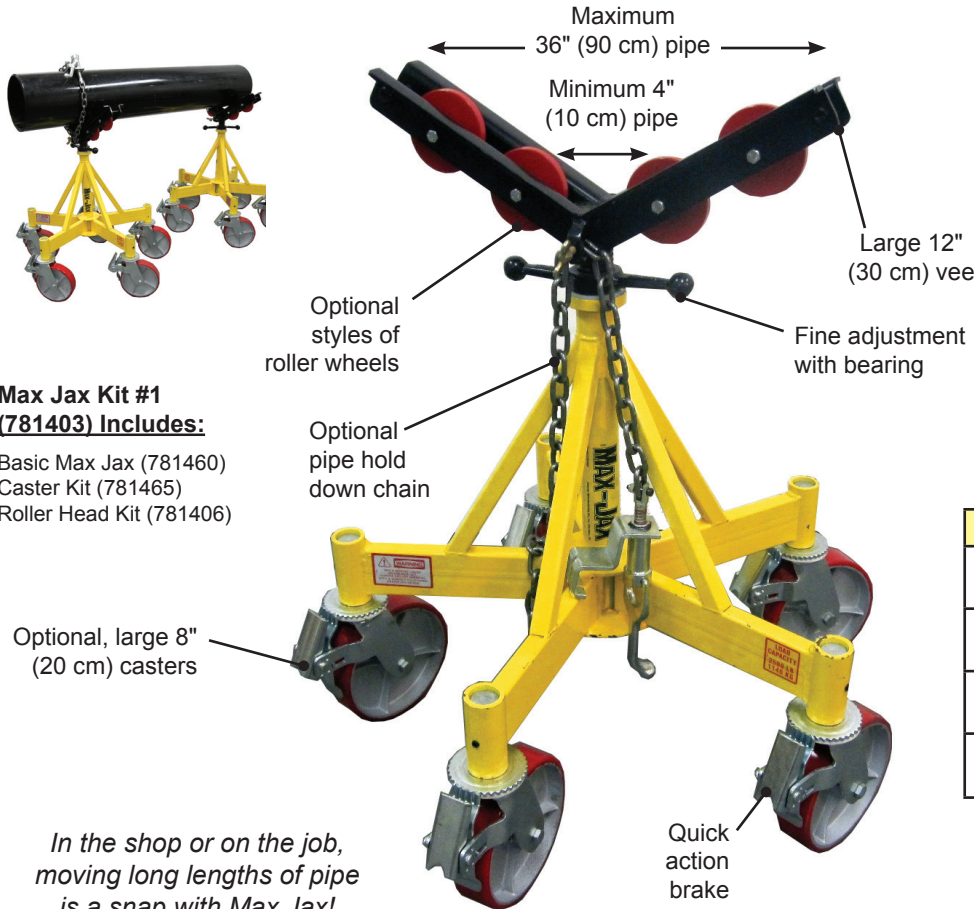

Max Jax Kit #1 (781403) Includes:
 Basic Max Jax (781460)
 Caster Kit (781465)
 Roller Head Kit (781406)

- ▶ Steel casters now standard
- ▶ 2,500 lb (1,135 kg) Load Capacity
- ▶ Safely handles pipe up to 36" (90 cm) in diameter
- ▶ Sturdy 5-leg construction for greater stability


Specifications			
Basic Unit	height	27.0" (686 mm)	
	width	29.6" (752 mm)	
Basic Unit with casters	height	36.5" (927 mm)	
	width	39.5" (1,003 mm)	
Vee-Head height	min.	21.0" (533 mm)	
	max.	33.0" (838 mm)	
Vee-Head height with casters	min.	30.5" (775 mm)	
	max.	42.5" (1,080 mm)	

In the shop or on the job, moving long lengths of pipe is a snap with Max Jax!

MADE IN USA

Part No.	Description	Weight	
		lb	kg
781460	Max Jax -Basic	68.4	26.4
781403	Max Jax Kit #1	144.0	65.5
781381	Large Roller Wheel Kit	12.0	5.5
781382	Stainless Steel Sleeves	5.0	2.3
781383	Standard Ball Transfer Kit	5.0	2.3
781394	Rubber Wheel Kit	4.0	1.8
781397	Stainless Steel Ball Transfer Kit	5.0	2.3
781406	Roller Head Kit	9.0	4.1
781407	Stainless Steel Roller Head Kit	9.0	4.1
781465	Roller Wheel Caster Kit (Max Jax)	75.0	34.1

The **Hold-Down Device** uses high tensile strength chain to grip material in any Sumner vee-head jack. Ideal for fitting up flanges, fittings or valves, and a must when working with short lengths.



Part No.	Description	Weight	
		lb	kg
781050	ST-448 Hold-Down Device	6.5	2.9
781056	Chain Extension Kit (12" pipe increments)	3.5	1.6

SUMNER

Sumner Manufacturing Co, Inc.

www.sumner.com

DISTRIBUTED BY:

Sumner - U.S. 7514 Alabonson Road • Houston, TX 77088 • Ph: 281-999-6900 • Fax: 281-999-6966

Sumner - Canada 75 Saltsman Drive, Unit 5 • Cambridge, Ontario N3H 4R7 • Ph: 519-653-5300 • Fax: 519-653-5305

Sumner - Netherlands Midden Engweg 21 • NL-3882TS Putten • The Netherlands • Ph: +31 (0) 85 489 0284 • europeansales@sumner.com

Sumner - U.K. Unit 3 Kempton Road • Keytec 7 Business Park • Pershore, Worcestershire WR10 2TA • Ph: (44) 01386 556278 • Fax: (44) 01386 556776